


Part Number: 3570 1333
Instrumentation Grade SIP - 1 Form A
Product Data Sheet

PICTURE



FEATURES


- High Reliability Instrumentation Grade reed switch with sputtered Ruthenium contacts.
- SIP 1 Form A - 10 W dry reed relays
- Ideal for test and instrumentation applications.
- High Insulation Resistance : $10^{12} \Omega$ MIN
- Molded thermoset industry standard package.
- Optional internal coil suppression diode.
- UL File E358613

✓RoHS Compliant

ORDERING INFORMATION


| Series | Coil | Options |
|------------|------|----------------|
| 3570.1333. | 05 | 1 = no diode |
| | 12 | 3 = with diode |

SCHEMATIC

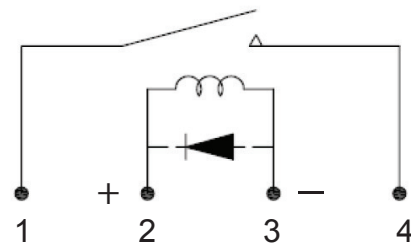

Part Number Example: 3570.1333.xxx
 3570.1333.051 = 5 volt coil, no diode

DIMENSIONS

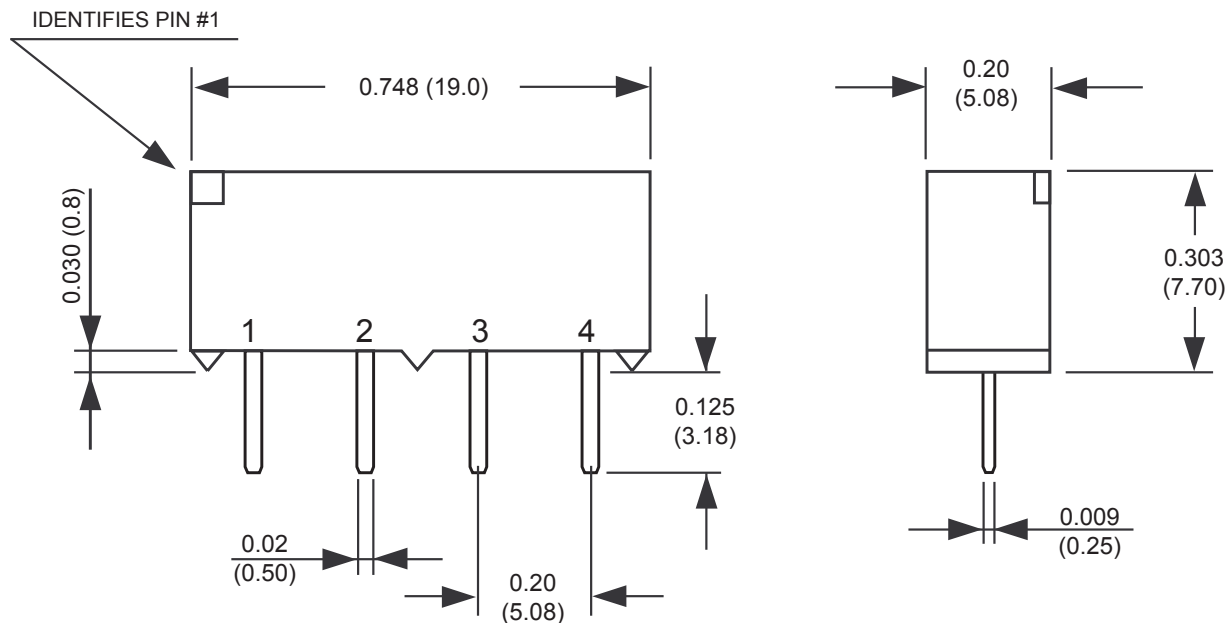

Drawings not to scale.
 All dimensions in inches (mm) nominal.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 42023510

©2018 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

Part Number: 3570 1333
Instrumentation Grade SIP - 1 Form A
Product Data Sheet

COIL DATA-STANDARD TYPE 1 FORM A (at 20°C)

| NOMINAL COIL VOLTAGE (VDC) | NOMINAL COIL RESISTANCE ±10% (Ω) | MAX OPERATE VOLTAGE (VDC) | MIN RELEASE VOLTAGE (VDC) | MAX COIL VOLTAGE (VDC) |
|----------------------------|----------------------------------|---------------------------|---------------------------|------------------------|
| 5 | 500 | 3.75 | 0.8 | 7 |
| 12 | 1000 | 9 | 1 | 16 |

CONTACT RATING

| | |
|-----------------------|---------|
| Max Switching Power | 10 W |
| Max Switching Voltage | 200 VDC |
| Max Switching Current | 0.5 A |
| Max Carry Current | 1.5 A |

SPECIFICATION

| | |
|--|--|
| Contact Resistance (Initial) | MAX 150 mΩ |
| Operate Time - including bounce (Typical) | 0.35 ms (At Nominal Voltage) |
| Release Time (Typical) | 0.1 ms |
| Insulation Resistance @ 100V, 20°C, 40% RH (MIN) | 10 ¹² Ω |
| Dielectric Strength (MIN) | Between Open Contacts 200 V DC / peak AC Between Coil to Contacts 1500 V DC / peak AC |
| Capacitance Between Open Contacts (Typical) | 0.5 pF |
| Vibration | 20G |
| Shock | 50G |
| Operating Temperature | -40° +85°C |
| Storage Temperature | -40° +100°C |
| Life Expectancy of Electrical | 1000 x 10 ⁶ ops (1 VDC, 10mA) |

SOLDERING THROUGH-HOLE

The attachment method is typically eutectic soldering. RoHS requires solder with no elemental lead (Pb). SAC alloy (96,5Sn / 3AG / 0,5Cu) is the most popular choice. Reed relays can be soldered by hand or by wave solder processing. Comus International recommends the maximum wave solder temperature (measured at the reed relay leads) as 270°C for 10 seconds. Temperature and time in excess of the recommended levels may result in damage to the reed relay. All of our through-hole reed relays will be compatible with either SAC alloy or eutectic soldering process.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 42023510

©2018 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

Rev: 3 - Date: Mar/14/2018 - Signature: BR

An ISO 9001 Certified Company