## D04E05HWBT00

DC axial fans

> CONTACT US



Axial fans provide forced-air cooling solution to temperaturesensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data			
APPROVALS			
Approvals	CE; cURus; UKCA		
PERFORMANCE			
Max Airflow	10	m³/h	
	6	CFM	
Max Static Pressure	25	Pa	
	0.10	in H2O	
RPM	6000	RPM	
ELECTRICAL DATA			
Rated Voltage	24	V d.c.	
Rated Current	0.09	А	
Rated Power	2.16	W	
Operating Voltage	21.6-26.4	V d.c.	
Starting Voltage	17	V d.c.	
Insulation Class	A		
Motor Protection	Electronically Protected		
MECHANICAL DATA			
Bearing	Ball Bearing		
GENERIC DATA			
Casing Material	Plastic UL94-V0		
Airflow Direction	Air exhaust over brackets		
Electrical Connection	Wires		

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



## D04E05HWBT00

DC axial fans

> CONTACT US

Technical data		
Life Expectancy	70000	h at 40 °C
	70000	h at 104 °F
Fan Noise	30.5	dB(A)
Cable Length	300	mm
	11.81	in
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP20	
Operating Temperature	-10÷70	°C
	14÷158	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F
UL DATA		
UL File Number Recognized Component	E223195	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



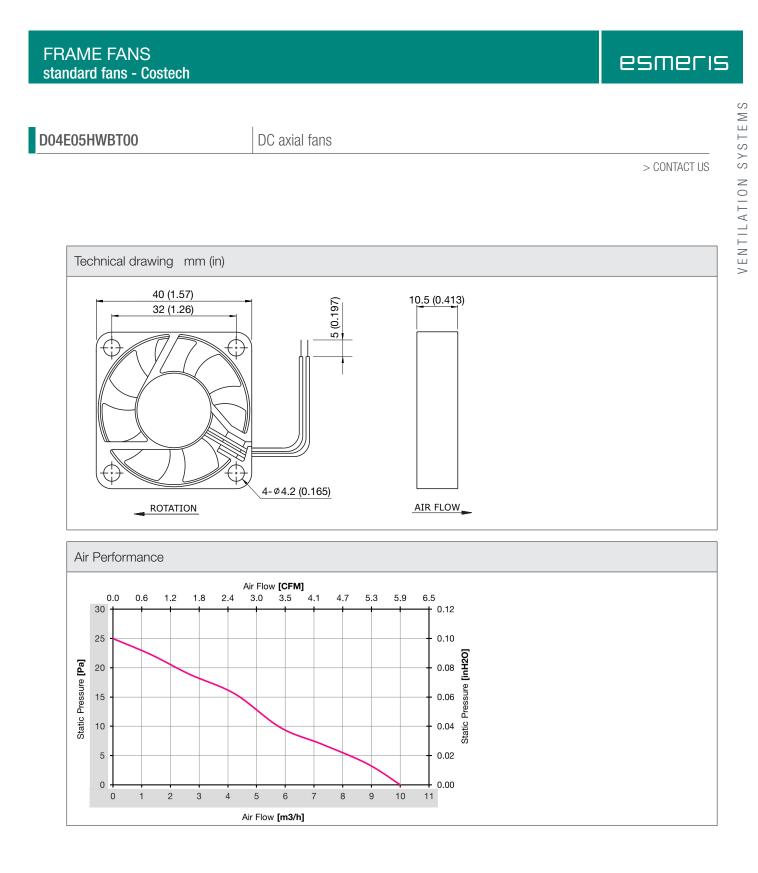


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

